



IMPRONTACERAMICHE

# MARMO ◀D▶ WALL & FLOOR

IN NATURE, MARBLES HAVE COUNTLESS VARIETIES AND INFINITE PATTERNING VARIATIONS. MARMO D USES DIGITAL TECHNOLOGY TO RE-CREATE THE SURFACES FOUND IN NATURE AND FAITHFULLY REPRODUCES MARBLE'S DIFFERENT VEIN PATTERNS, OFFERING DIGITAL DESIGN, INNOVATION AND ELEGANCE.

## MARMO ◀D▶ WALL 10 X 22


The 10 x 22 white body wall tile, with a shiny finish, mirrors and reflects the light, increasing the impression of space and luminosity. ICMD--W/1022



Calacatta



Travertine Bianco



Marfil



Travertine Walnut

### COLORS

- ICMDCAW Calacatta
- ICMDMLW Marfil
- ICMDTBW Travertine Bianco
- ICMDTWW Travertine Walnut

### TRIM


The surface bullnose is made from field tile that is cut, ground and then glazed.

- ICMD--W/A110 10" Quarter Round
- ICMD--W/AC110 Beak

### USAGE

Residential to light commercial applications for walls.

### CALACATTA ORO POLISHED MOLDINGS

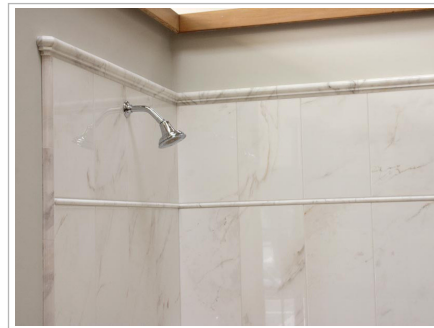

The 1 x 12 Matita and 2 x 12 Capo from Tesoro Marmo Classico can be used as finishing trim and accents with the Marmo D Calacatta wall tile.

Colors are intended as a guide only and may vary from actual tile. Please check tile samples before making final selections. See reverse side for product information.

# MARMO ◀D▶ FLOOR 14 x 14 ★ 2 x 2 FLOOR MOSAIC

The 14 x 14 glazed porcelain stoneware floor tile and 2 x 2 floor mosaic (mounted on square foot sheets), has a matte finish and is suitable for a variety of installations. It providing the look of marble with the ease of maintenance of porcelain. ICMD--F/1414 and ICMD--F/22



## TRIM

The surface bullnose is made from field tile that is cut, ground and then glazed.

ICMD--F/SBN 3 x 14 Surface Bullnose

ICMD--F/A114 14" Quarter Round  
ICMD--F/AC114 Beak

## COLORS

ICMDCAF Calacatta  
ICMDTBF Travertine Bianco



Calacatta



Travertine Bianco

## MURETTO MOSAIC

Various lengths x 5/8" pieces are randomly mounted on 14 x 14 inch sheets. Sheets can be used as full-sized field tiles or cut into feature strips. Available in Calacatta only.



ICMDCAF/MM

## PHYSICAL CHARACTERISTICS - FLOOR

| Physical Properties     | Norms      | Value                   |
|-------------------------|------------|-------------------------|
| Breaking Strength       | 10545-4    | ≥45 n/mm <sup>2</sup>   |
| Breaking Strength       | 10545-4    | > 45 n/mm <sup>2</sup>  |
| Water Absorption        | 10545-3    | ≤0.05%                  |
| Frost Resistance        | 10545-12   | Resistant               |
| Stain Resistance        | 10545-14   | Class 4/5               |
| Slip Resistance         | DIN51130   | R9                      |
| Coefficient of Friction | ASTM C1028 | >0.60 Dry<br>≥ 0.60 Wet |

## USAGE

Residential to light commercial applications.



The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed. For more information see our current handout *Americans with Disabilities Act and Slip Resistance of Tile*.